

•3ÿ p ¥ E2x7Á _&"%¼#Ý * 9x Mn 8 &" ö !

Cryogenic Non-magnetic High Mn Steel for Accelerator Superconducting Magnet


5 N ë j(Kiyohiko Nohara) É#Õ H / (Yasuhiro Habu)

0[" :

± ° •3ÿ p ¥ E b2x7Á _&"%¼ _ Q#Ý I € • * 8 &" ö - â ! q b6ä\$î%Ê'2 †/œ W S &"
#ú š · † 10-4 b œ î² î _ > | < • S u _ > * ^ 8 K > 2 > | _ > E • š3ñ&"á @3û - b8
&" ö ! b 1.02 è W | ~ v c • ? _ ` I 8 1.002 è W \ K > * ? X Ø v K C c M k Ñ ö †
` _ M • G \ @ 0 [Ó I € • I } _ • d \$ x pre-stress > | g7Á & " 1 _ Š _ * < • S u _ > *
> | g > 2 > | b7F I Ø †3û - b œ î « , ¼ - ° « , å Þ « | --- K C ± A C M • G \ > *
Q K Z f r K C c > * Nb3Sn 2x7Á _ ! b Q # Ý † - W K Z Ò ! Õ # . † b * í8 ö b Ž
ì † š D M • G \ @ ² 0 [[6 • G b S u _ * C-9xMn-N-V 5đ †6ä\$î K S G € c t ▫ A > *
« İ µ ° P K ö _ v f € •


Synopsis :

A cryogenic non-magnetic steel has been developed which is used as a supporting material for a superconducting magnet in a particle accelerator system. This steel must satisfy the following requirements: (1) Its magnetic permeability at RT and 4K shall



て行った。

3 実験結果および考察

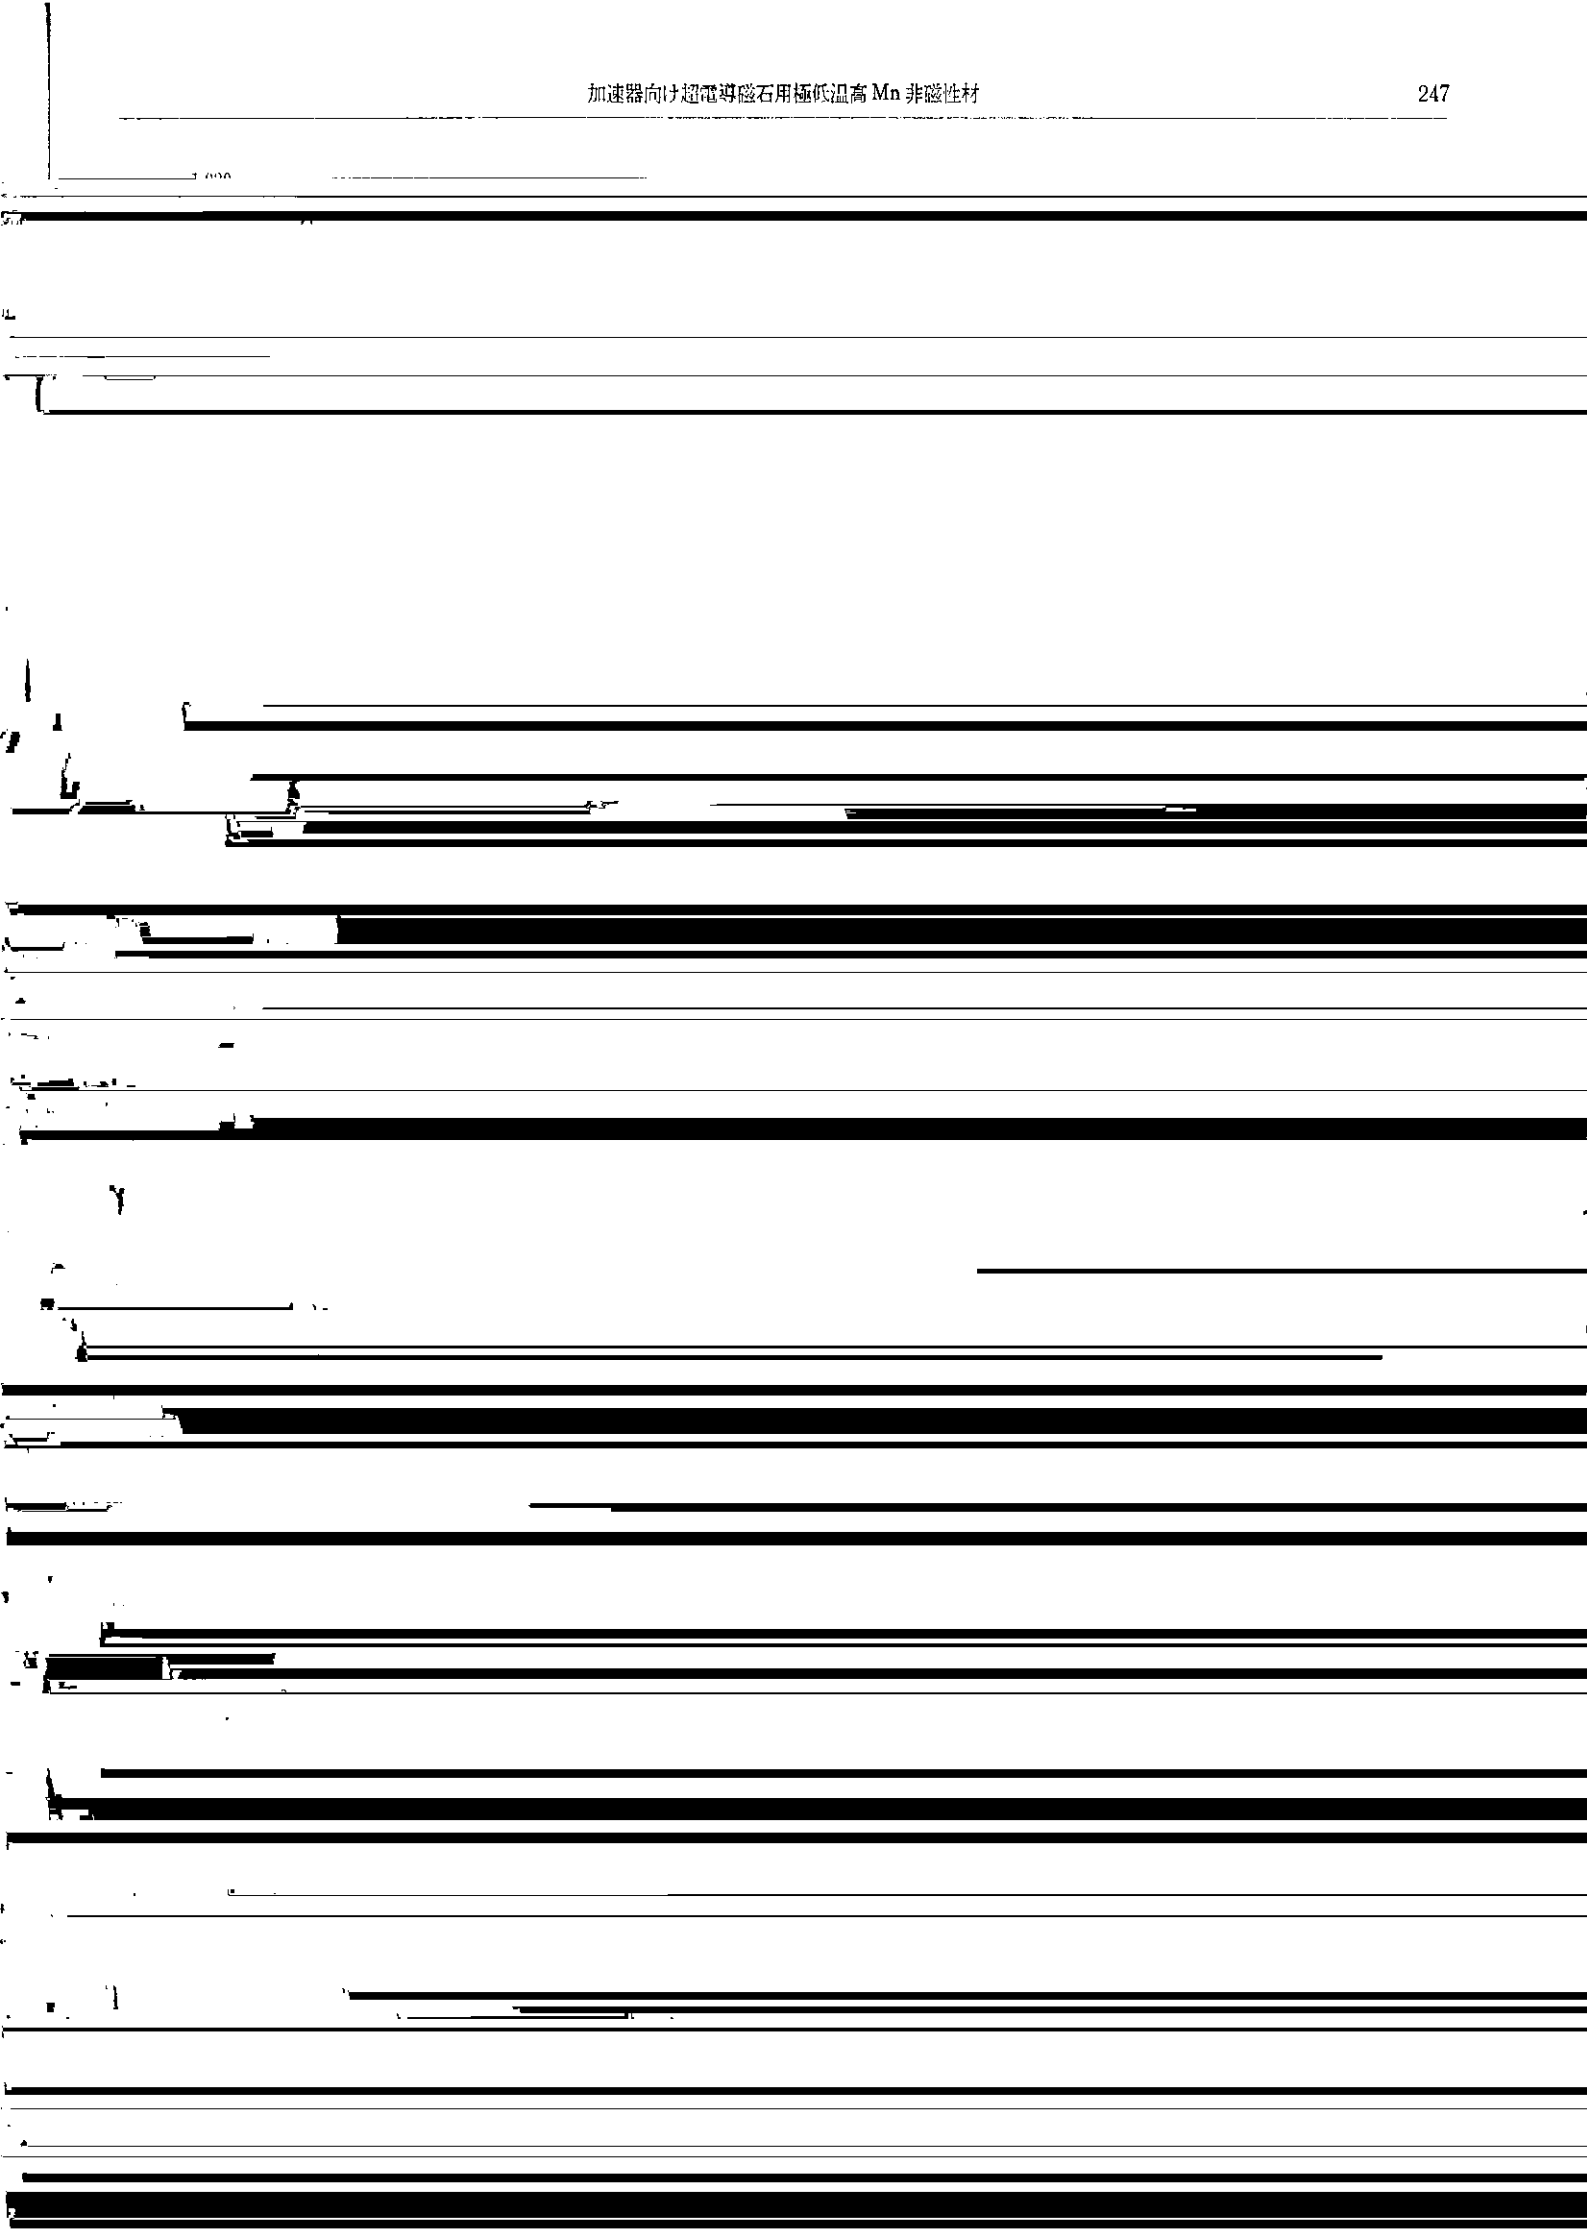

3 000 300

